

DPSK

DIAL GAUGE TORQUE DRIVERS

Suited for light torque, general tightening work, inspections. Easy to handle, easy to read scale.




FEATURES

■ DPSK (standard)

- A light torque driver well suited for general tightening, inspections and break tests.
- Easy handling with a direct reading dial gauge.
- Use for both clockwise and counterclockwise tightening.
- Peak torque indicator works in both directions, too.
- Large, easily read dial gauge.

■ DPSK II (transparent scale)

- The transparent scale makes engaging the fastener easier.
- For both models, accuracy is $\pm 3\%$ of the indicated value over the full range

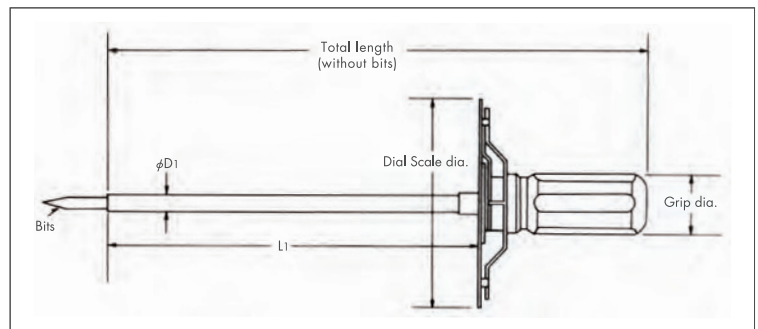


USING A DPSK DRIVER


(1) Mount a bit matching the fastener being



(2) Loosen the peak indicator ring.



(3) Set the peak indicator to 0.



(4) Tighten the fastener while observing the scale.



Model (kgf·cm)	Range (CW/CCW)	Increment	Old Model (cN·m/N·m)	New Model (cN·m/N·m)	Range (CW/CCW)	Increment	Dial dia.	Grip dia.	Total length (without bit)	Dimensions (mm)		Weight	Included Accessory	
										Driver shaft(mm)			Bits	
		kgf·cm			cN·m/N·m		φ mm	φ mm	mm	L ₁	φ D	kg	Phillips	Bit type
1DPSK	0.2 ~ 1	0.025	N 1DPSK	CN 10DPSK	2 ~ 10 cN·m	0.25 cN·m	78	22	217	152	6	0.075	No.0 No.1	KANON bits OB type
2DPSK	0.5 ~ 2	0.05	N 2DPSK	CN 20DPSK	5 ~ 20 "	0.5 "			195	130				
5DPSK	1 ~ 5	0.2	N 5DPSK	CN 50DPSK	10 ~ 50 "	2 "			208	143				
10DPSK	2 ~ 10	0.2	N 10DPSK	CN 100DPSK	20 ~ 100 "	2 "			222	130	12	0.33		
20DPSK	5 ~ 20	0.5	N 20DPSK	CN 200DPSK	50 ~ 200 "	5 "	78	33	242			0.36	No.1 No.2	Standard bits SB type
50DPSK	10 ~ 50	2	N 50DPSK	CN 500DPSK	100 ~ 500 "	20 "			300	188		0.47		
10DPSK(II)	2 ~ 10	0.2	N 10DPSK(II)	CN 100DPSK-L	20 ~ 100 cN·m	2 cN·m			222	130	12	0.29		
20DPSK(II)	5 ~ 20	0.5	N 20DPSK(II)	CN 200DPSK-L	50 ~ 200 "	5 "			242			0.32		
50DPSK(II)	10 ~ 50	2	N 50DPSK(II)	CN 500DPSK-L	100 ~ 500 "	20 "			300	188		0.42		

* is the new model that is applied from 1st January, 2016.